


BR3505 THRU BR3510

SILICON BRIDGE RECTIFIERS

Reverse Voltage - 50 to 1000 Volts Forward Current - 35.0 Amperes

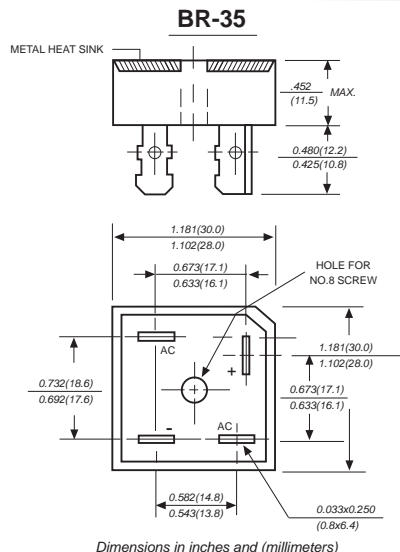

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Ideal for printed circuit boards
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 260°C/10 seconds, at 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: Molded plastic body

Terminals: Plated leads solderable per MIL-STD-750, Method 2026

Polarity: Polarity symbols marked on case

Mounting: Thru hole for #8 screw, 20in.-lbs. torque max.

Weight: 0.66 ounce, 18.7 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave 60Hz, resistive or inductive load, for current capacitive load, derate by 20%.

	SYMBOLS	BR 3505	BR 351	BR 352	BR 354	BR 356	BR 358	BR 3510	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	VOLTS
Maximum average forward output rectified current at $T_c=50^\circ\text{C}$ (Note 1,2)	$I_{(AV)}$	35							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	400.0							Amps
Rating for Fusing ($t < 8.3\text{ms}$)	I^2t	664							A ² s
Maximum instantaneous forward voltage drop per bridge element at 17.5A	V_F	1.1							Volts
Maximum DC reverse current at rated DC blocking voltage	I_R	10							mA
		1.0							mA
Isolation voltage from case to leads	V_{ISO}	2500							V_{AC}
Typical Thermal Resistance (Note 2)	R_{qJA}	2.0							°C/W
Operating junction temperature range	T_J	-65 to +150							°C
storage temperature range	T_{STG}	-65 to +150							°C

NOTES:

1. Unit mounted on 9" x 3.5" x 4.6" thick (23cm x 9cm x 11.8cm) Al. plate.

2. Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface for maximum heat transfer efficiency with #8 screw.